

# RF-2400 Radio Module Pairing Guide

For ARRI TRINITY 2 SUP 1.4

USER MANUAL

April 2023




# 1 Pairing the TRINITY 2 RF-2400 Radio Modules


ADVICE

Both RF-2400 Radio Modules can only be paired through the Remote Control Panel RCP-3.


- ▶ Power up and switch on the RCP-3

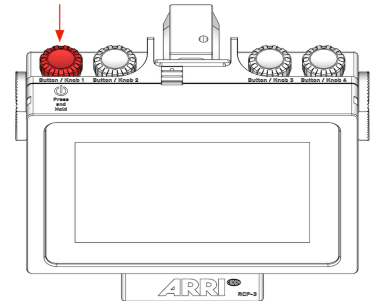


- ▶ Insert the **first** RF-2400 Radio Module

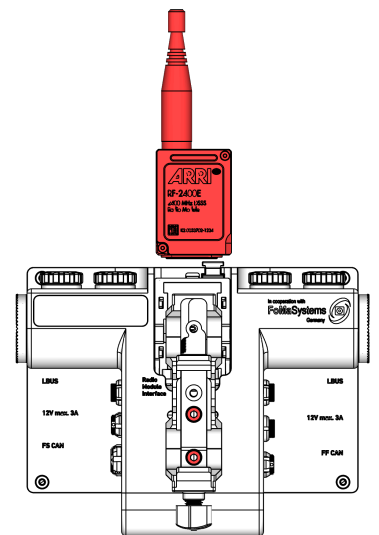


- ▶ Go to the **Main Menu**.

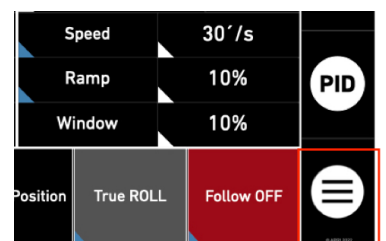

- ▶ Tab **Radio Setup**

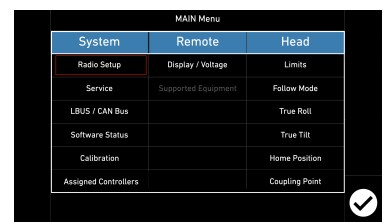


- ▶ Tap **Pairing**

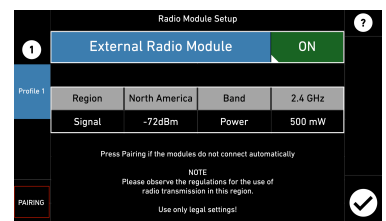


- ▶ After a short time, you will be asked to remove the first module and insert the second module.

- ▶ So, **remove the first** radio module and insert the second module.

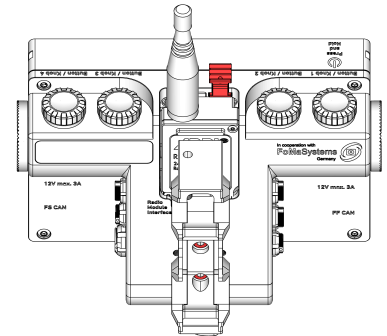

- ▶ Insert the **second** radio module.

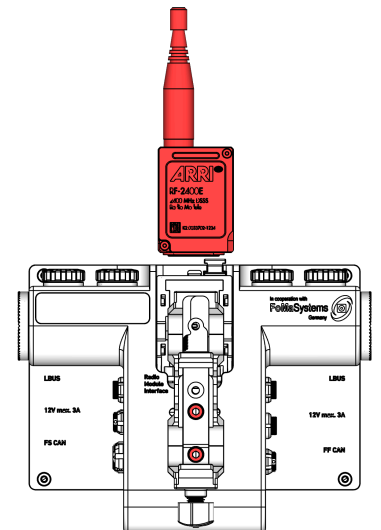

- ▶ Again, after a short time, the information appears that the second module has also been paired.
- ▶ Now you can plug the **first** module into the radio adapter on the TRINITY 2.

#### ADVICE

Be sure to use the **Rubber Duck antenna** on the radio module located in the TRINITY 2 head.

The standard antenna will **block** the tilt movement of the **tilt axis!**

