



SRH-3

Stabilized Remote Head





The new Stabilized Remote Head SRH-3 offers top quality and performance. The SRH-3 is a three-axis fully stabilized remote head allowing for cameras to go where no person can with increased flexibility and ease. Whether it be on set, in a studio, or at an event, our new intelligent and adaptive Stabilized Remote Head SRH-3 has the full force of ARRI technology behind it.

Remote Control Panel



Digital Remote Wheels



SRH-3



Smart and adaptive system

The motors inside the ARRI Stabilized Remote Head SRH-3 can compensate for external centrifugal force by adding extra motor power. SRH-3 can also be remote controlled with its newly designed, joystick based ARRI SRH-3 control board, or with optional wheels.

High payload, low weight, compact design

The ARRI Stabilized Remote Head SRH-3 is extremely compact and light, weighing in at 9 kg /19.8lb. However, the low weight does not equate to lower support capabilities – the SRH-3 is able to handle payloads of up to 30kg / 66 lb in excess of three times its own weight.

Budget friendly


The ARRI Stabilized Remote Head SRH-3 delivers premium features without breaking your budget. Despite the tight price constraints it brings with it the high quality and workmanship you expect from ARRI.

Future-proof workflows

The ARRI Stabilized Remote Head SRH-3 is perfectly compatible with other ARRI products and workflows. ARRI stands behind its products, continually offering years of service and updates to users.

Technical Specifications

Stabilized Axis	3 (Pan, Tilt, Roll)
Max. Payload	up to 30 Kg / 66 lbs
Height	61 cm / 24"
Width	41,2 cm / 16,22"
Depth Head	13 cm / 5.12"
Death Base	16,5 cm / 6,49"
Ring Diameter	26 cm / 10,23"
Ring Height centre	20,9 cm / 8,23"
Weight	9,0 Kg / 19.8 lbs
Max. Tilt Range	+60°/-110°
Max. Roll Range	+/- 90°
Max. Pan Range	540° +/-270°
Max. Pan Rate	240° / Sec.
Max. Tilt Rate	240° / Sec.
2,4 GHz bi-directional wireless control	
Operating Voltage	24 - 36 Volt

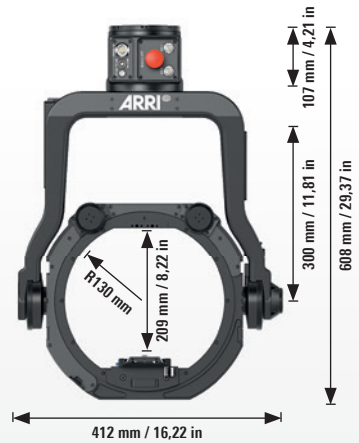

Connectors Head:

2 x HD SDI In 1 (6 GHz)
ARRI RS / 3pin Fischer 102
ARRI LBUS / 4pin LEMO 0B
12V High Capacity Camera Power Out
12V / 24V Camera Power Out
Aux Power Out / 2pin LEMO 0B
FF-CAN / 4pin Fischer 102

Connectors Base:


2 x HD SDI In 1 (6 GHz)
ARRI LBUS / 4pin LEMO 0B
FS-CAN / 4pin Fischer 103
12V / 24V Main Power In



Accessories



SAM-1 / K2.0018851



SAM-2 / K2.0014215



SAM-3 / K2.0014630

Master Grips:

- K2.0009493 Master Grip Right Rocker MRR-1
- K2.0009363 Master Grip Left Wheel MLW-1
- K2.0009494 Master Grip Right Wheel MRW-1
- K2.0009490 Master Grip Left Rocker MLR-1

SAM Plates:

The SAM plates offer optical-centred mounting of ALEXA, the ALEXA Mini and the AMIRA cameras to the ARRI Trinity and MAXIMA and SRH-3 systems.



Digital Remote Wheels DRW-1:

The well established wheels from the ARRI Head are now fully digital. This modern digital version of an outstanding industrial standard adds another LBUS compatible control device to ARRI's ECS.

KK.0021212

Focus/Zoom Set for Remote Control Panel:

K0.0019595 Focus / Zoom Set for Remote Control Panel

Contains:

- K2.0019291 Focus Knob for SRH-3 Remote Control
- K2.0019292 Zoom Rocker for SRH-3 Remote Control

Additional focus wheel and zoom rocker set for the remote control panel. The upgrade can be done by the operator.





600 Watt Power Supply:

This optional 600 Watt power supply for the SRH-3 guarantees constant 12V and 24V power for the SRH-3 stabilised remote head and to the camera.

K0.0019478 SRH-3 Power Supply Set, 600W

Contains:

K2.0019299 SRH-3 Power Supply, 600W, 220V/110V

K2.0019303 SRH-3, Main Power, Data Cable, 12V/24V, 20 m/65.6ft

Camera power cables:

- K2.0010470 Cam Power / Cine / 12V XLR HiCap
- K2.0010538 Cam Power / Cine / 12V HiCap / ALEXA
- K2.0010540 Cam Power / Cine / 12V HiCap / ALEXA Mini
- K2.0010543 Cam Power / EFP / 12V HiCap / ALEXA Mini / 90°
- K2.0010471 Cam Power / Cine / 24V / ARRI
- K2.0010548 Focus Power / ARRI (3pin Fischer (RS))

SRH-3 Power cables:

- K2.0019303 SRH-3, Main Power, Data Cable, 12V/24V, 20 m/65.6ft
- K2.0019306 SRH-3, Battery Power Cable, 12V/24V, 0.5m/1.64ft
- K2.0019305 SRH-3, Battery Power Cable, 12V/24V, 7.5m/24.6ft
- K2.0019304 SRH-3, Battery Power Cable, 12V/24V, 20 m/65.6ft

Remote control cables:

- K2.0019302 SRH-3, FS CAN Bus Cable, 10m/32.8ft
- K2.0019301 SRH-3, FS CAN Bus Cable, 25m/82 ft
- K2.0019300 SRH-3, FS CAN Bus Coupler, 0.2m/0.65ft
(Have to be ordered separately)



Please contact your local dealer for more information

www.arri.com/goto/sales/camera