


EB MAX 2.5/4

Main Features

- Automatic or manual control of lamp frequency



MAX Technology – Max Performance

Starting with the EB MAX 1.8 in 2017 ARRI built the foundation for a whole new range of high speed electronic ballasts – the EB MAX range. Together with three other models – EB MAX 2.5/4, EB MAX 6/9 and EB MAX 12/18 – the MAX range combines cutting-edge features with new remote control possibilities from 575 up to 18,000 W.

The EB MAX 2.5/4 is designed for two power classes: 2,500 W and 4,000 W. When combined with state-of-the-art ARRI daylight lampheads such as the True Blue D25 and D40 or M-Series M40, it enables optimal performance and advanced control for high image quality – at any frame rate.

The EB MAX 2.5/4 is equipped with essential features such as Active Line Filter (ALF) and Compensation of Cable Losses (CCL), delivering maximum light quality with efficient supply and wiring. The AutoScan feature ensures optimum light and image quality with a minimum of effort for high-speed recordings up to 1,000 fps and beyond.

Besides lamp operation at 50 or 60 Hz, if noise needs to be minimized, or at 75 Hz for standard frame rates, the EB MAX range accommodates high-speed frequencies at 1,000 Hz and – for the first time – at 300 Hz.

Three different modes are available for high-speed operation: AutoScan (fully automatic), Man (manual frequency control) or AutoMan (combining manual frequency setting with automatic frequency control). Using the AutoScan mode requires no further interaction by an operator. After a two-stage scan the lamp frequency is selected and set by the ballast; all parameters are continuously monitored and adjusted automatically, if required.

The EB MAX 2.5/4 as well as the other models of the EB MAX range offer new levels of DMX control. In addition to On/Off and dimming, both operation mode and frequency can now be controlled remotely. For ultimate ease of use, indicators on the ballast’s front panel display the lamp wattage, DMX channel, operation mode and selected lamp frequency.


For Daylight-Systems ARRI offers an extended warranty period of five years.



5 YEAR
warranty for new daylight systems (head + ballast)

Technical Specifications

EB MAX 2.5/4

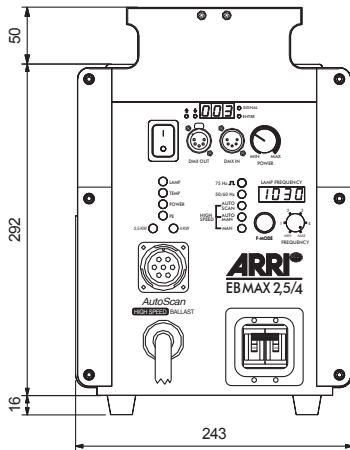

L2.0016746	EB MAX 2.5/4, ALF, CCL, DMX, AutoScan 300 / 1,000 Hz
L2.0018884	EB MAX 2.5/4, ALF, CCL, DMX, AutoScan 300 / 1,000 Hz, Schaltbau
L2.0019423	EB MAX 2.5/4, ALF, CCL, DMX, AutoScan 300 / 1,000 Hz (Canada)

Ballast Type	Electronic High Speed Ballast for discharge lamps
---------------------	---------------------------------------------------

Lamphead Types	ARRI M-Series M40, ARRISUN 40/25, ARRI True Blue D25 and D40, (ARRI Compact 2500 and 4000)
-----------------------	--------------------------------------------------------------------------------------------

Weight	approx. 20.5 kg (45.2 lbs)
---------------	----------------------------

Dimension	358 x 243 x 450 mm / 14.1 x 9.6 x 17.7" (H x W x L)
------------------	-----------------------------------------------------

Line Connection	bare ends
------------------------	-----------

Lamp Power	2,500 W and 4,000 W, discharge lamps only
-------------------	-------------------------------------------

Line Voltage	100 - 130 V~ / 180 - 250 V~, 50/60 Hz, 1, N, PE (single phase)
---------------------	----------------------------------------------------------------

Line Current	47 - 42 A (115 V~) 30 - 22 A (230 V~)
---------------------	------------------------------------------

Max. Power	5,400 VA (max.)
-------------------	-----------------

Power factor (cos φ)	cos φ 0.98 due to Active Line Filter (ALF)
-----------------------------	--------------------------------------------

Efficiency	min. 0.91
-------------------	-----------

Protection Class / IP Rating	I / IP20
-------------------------------------	----------

Temperature	45°C (113°F) for max. ambient temperature
--------------------	-------------------------------------------

Active Line Filter (ALF)	√
---------------------------------	---

Compensation of Cable Losses (CCL)	Up to 100 m (115 V~) Up to 100 m (230V~)
-------------------------------------------	---------------------------------------------

DMX	512, In and Out, 3 channels Dimming 100 % to 50 % of electrical output power On/Off Switch Mode Selection (Low Noise, Standard, AutoScan, AutoMan, Manual) Frequency setting (High Speed only)
------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

DMX Connector	DMX In / Out (XLR 5-pol) connector
----------------------	------------------------------------

Ignition	Cold start and hot restrike
-----------------	-----------------------------

Automatic Detection	Lamp wattage detection Lamphead detection
----------------------------	----------------------------------------------

Lamp Frequencies	50/60 Hz (Low Noise) 75 Hz (Standard) 300 Hz / 1,000 Hz (High Speed; 3 modes)
-------------------------	-------------------------------------------------------------------------------------

High Speed Modes	AutoScan: Frequency scan, automatic control and adjustment of lamp frequency AutoMan: Manual frequency setting with automatic control and adjustment of lamp frequency Man: Manual frequency setting only, no automatic adjustment
-------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

High Speed Frequency Ranges	300 Hz : 270 - 360 Hz 1,000 Hz : 900 - 1,200 Hz
------------------------------------	----------------------------------------------------

Indication	Display for DMX channel and lamp frequency Successful ignition with LED „LAMP“ (yellow) Overtemperature with LED „TEMP“ (red) Line Power with LED „POWER“ (green) Protective earth with LED „PE“ (green) Lamp type with LED (2.5 kW green, 4 kW yellow)
-------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

All values are nominal / typical values.

